


### Häfele Loox Profile 1193 for recess mounting

14 mm deep, angled, indirect light output

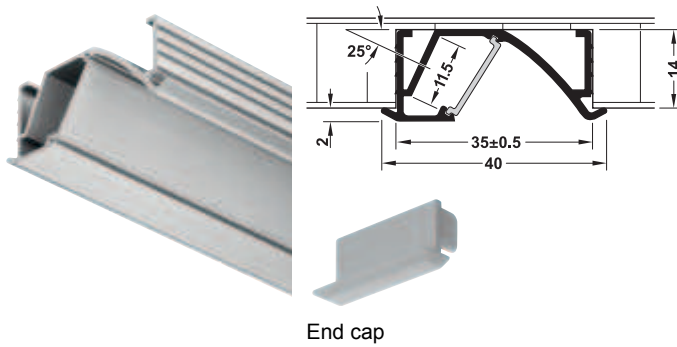


- > Area of application: For panel thickness from 16 mm and above
- > Installation: For recess mounting

**Note**

For single-row Loox LED strip lights 12 V and 24 V.  
Not suitable for use with LED 3028.

	Version	Length mm	Material	Finish/colour	Packing	Cat. No.
Aluminium profile	Opal white diffuser	2500	Aluminium	Silver coloured anodized	1 piece	833.72.990
End cap	With cable outlet	–	Plastic	Silver coloured	1 pair	833.74.848

### Häfele Loox Diffuser

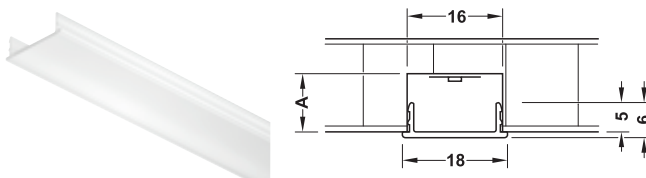

- > Installation: For recess mounting

**Note**

Only suitable for 12 V LED strip lights

Diffuser	Min. dim. A for invisible LED points						
	LED 2016	LED 2029	LED 2037	LED 2041	LED 2042	LED 2043	LED 2045
Milky	26 mm	10.5 mm	10.5 mm	10.5 mm	18 mm	10.5 mm	13 mm

	Version	Length mm	Material	Cat. No.
Loox diffuser	Milky	2500	Plastic	833.74.794

Packing: 1 piece


### Häfele Loox Cooling strip



- > Area of application: For heat dissipation of LED strip lights
- > Material: Aluminium
- > Dim. (W x H): 10 x 2 mm
- > Installation: For screw fixing

**Note**

Only suitable for LED strip lights up to a width of 10 mm

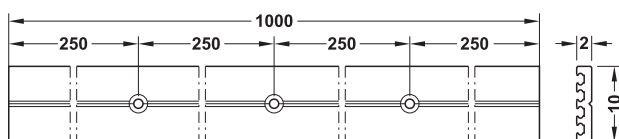

	Length mm	Cat. No.
Loox cooling strip	1000	833.77.700

Packing: 1 piece

DGH-M-INT 2020, HDE-en, 05/19, Dimensional data not binding. We reserve the right to alter specifications without notice.

2  
GAEB  
CAD  
LED Accessories