


## Mechanical switches



### Häfele Loox universal door contact switch, modular – on/off switching

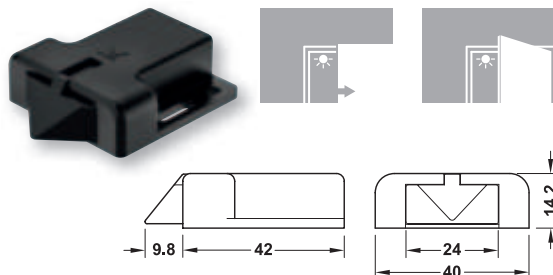

The universal door contact switch is suitable for hinged doors or single-leaf sliding doors.

- > Material/colour: Plastic, black
- > Degree of protection: IP20
- > Supplied with: 1 switch with fixing material

Length x width mm	Height mm	Cat. No.
51.8 x 40	14.2	833.89.143

- ⊕ Please order lead with snap-in connector for modular switches driver separately. Length 2 m: Cat. No. 833.89.142.

### Häfele Loox lead with snap-in connector for modular switches




- > Degree of protection: IP20
- > Supplied with: 1 lead

Material/colour:	Length mm	Cat. No.
Plastic, black	500 mm	833.89.140
	1000 mm	833.89.141
	2000 mm	833.89.142

- ⊕ Required for modular switches

- ⚠ Drill hole Ø for plug: 12 mm

### Häfele Loox door contact switch – on/off switching

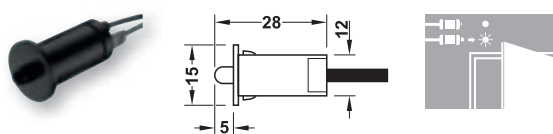


- > Degree of protection: IP20
- > Drill hole Ø: 12 mm
- > Supplied with: 1 switch with 2 m lead

Material/colour	Length mm	Cat. No.
Plastic, black	28	833.89.059

- ⚠ Drill hole Ø for plug: 12 mm

### Häfele Loox push switch – on/off switching

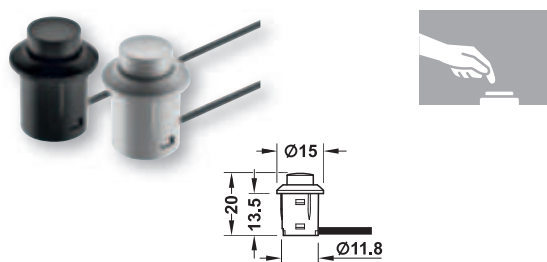

- > Drill hole Ø: 12 mm
- > Supplied with: 1 switch with 2 m lead

Material/colour:	Length mm	Cat. No.
Plastic, black	20	833.89.108
Plastic, grey		833.89.107

- ⚠ Drill hole Ø for plug: 12 mm