Distributor

ILLUMINATING

EXTENDING

SWITCHING

NETWORKING

DISTRIBUTING

SUPPLYING

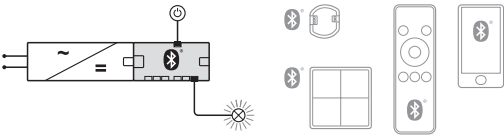**Häfele Connect Mesh 6-way distributor, with switching function**

> Control several light colours on one box!
> Each output port can be controlled individually.

> Area of application:	For on/off switching and dimming (0–100%) of monochrome lights; or, in conjunction with adapters, for the operation of multi-white lights, RGB lights, and electrically operated fittings
> Version:	With programmable switching input For standard Loox switches (switching function programmable via app; each active component can control each passive component, see page 97)
> Material:	Plastic
> Colour:	Black
> Dim. (L x W x H):	120 x 50 x 16 mm
> Number of connections:	1x input port with box to box plug 1x output port with box to box socket 1x input port switch socket 6x output ports device sockets (2-pin), can be controlled from any active component of the network
> Supplied with:	1 distributor

Häfele Connect Mesh App
> Detects and reports new nodes in the network independently
> Intuitively assign functions to switches
> Set up light groups and scenes
> Share your protected access with others
> The Häfele Connect Mesh App is free for Apple iOS® and Android™.

MESH

Voltage	Max. connected wattage W	Cat. No.
5 12 V	60	850.00.042
5 24 V	90	850.00.043

The distance between the smartphone or tablet to the nearest Häfele Connect Mesh component is approx. 10 m. Multiple components create a network, and can also be placed approx. 10 m apart.

Please order adapter for multi-white lights, RGB lights, or electrically operated fittings separately, see page 99
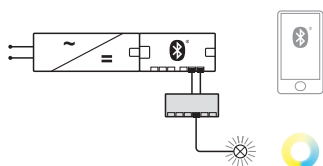
6-way distributor for monochrome lights or other 2-pin devices, such as electrically operated fittings, see page 104

FC ⊜ ⚠

Adapters

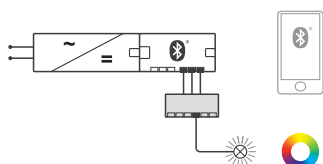## Häfele Loox5 multi-white adapter for Häfele Connect Mesh 6-way distributor

> Area of application: For connecting multi-white lights to the Häfele Connect Mesh 6-way distributor
> Material/colour: Plastic, black
> Dim. (L x W x H): 70 x 30 x 14 mm
> Number of connections: 2x input port with plug, monochrome
> 6x output ports device sockets, multi-white
> Supplied with: 1 distributor with 80 mm lead

Voltage	Max. connected wattage W	Cat. No.
5 12 V	60	833.95.745
5 24 V	90	833.77.830

! 1 multi-white adapter occupies 2 output ports at the 6-way distributor.

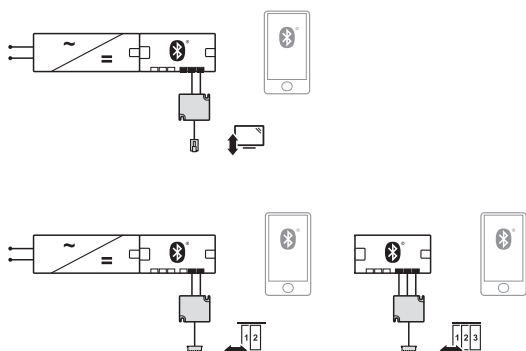## Häfele Loox5 RGB adapter for Häfele Connect Mesh 6-way distributor

> Area of application: For connecting RGB lights to the Häfele Connect Mesh 6-way distributor
> Material/colour: Plastic, black
> Dim. (L x W x H): 70 x 30 x 14 mm
> Number of connections: 3x input port with plug, monochrome
> 6x output ports for device sockets, RGB
> Supplied with: 1 distributor with 80 mm lead

Voltage	Max. connected wattage W	Cat. No.
5 12 V	60	833.95.746
5 24 V	90	833.77.831

! 1 RGB adapter occupies 3 output ports at the 6-way distributor.

Häfele Connect Mesh adapter for electrically operated fittings

> Area of application: For connecting electrically operated fittings to the Häfele Connect Mesh 6-way distributor.
> Supplied with: 1 distributor

Voltage		Number of connections	Cat. No.
5 12 V	TV lift adapter	Occupies 2 output ports	850.00.057
	eDrive 2 doors adapter	Occupies 2 output ports	850.00.058
	eDrive 3 doors adapter	Occupies 3 output ports	850.00.059

LOOX 2019, HDE-en, 02/20: Dimensional data not binding. We reserve the right to alter specifications without notice.

Networking / 99

ILLUMINATING
EXTENDING
SWITCHING
NETWORKING
DISTRIBUTING
SUPPLYING