

Profile for surface mounting Häfele Loox5, Profile 2104



2

12/24 V



> Asymmetrical light distribution provides a glare-free light source.



- > Version: For concealed fixing
- > Material: Profile: Aluminium, Diffuser: Plastic
- > Internal width: 11 mm
- > Diffuser width: 11 mm
- > Installation: For screw fixing with mounting clip

**Note**



For LED strip lights up to a width of 8 mm. Slide-in 10 mm wide clips from the side before installing the profile. Distance of retaining clips max. 500 mm. The surface on the aluminium profile that is to be bonded must be cleaned before bonding to the LED strip lights. It must be completely clean, grease-free and dust-free!

**Diffuser**

The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with black version. If required, please order alternative diffusers in black or transparent separately.

**Supplied with**

- 1 aluminium profile
- 1 diffuser opal white

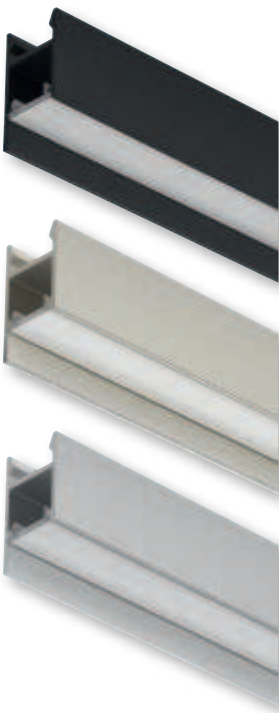

Flush diffuser

Colour/finish	Light permeability	2500 mm	3000 mm
Profile: Black, Anodized, Diffuser: Opal white	70–80%	833.94.120	833.95.739
Profile: Stainless steel coloured, Anodized, Brushed, Diffuser: Opal white	70–80%	833.94.121	833.95.765
Profile: Silver coloured, Anodized, Diffuser: Opal white	70–80%	833.94.119	833.95.738

Packing: 1 Piece


**Order reference**

Please order mounting clip (mandatory) separately.

DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.



→ Mounting clip for Häfele Loox5 profile for under mounting, profile 2103, 2104




- > Material: Stainless steel
- > Suitable for: Häfele Loox5 profile for under mounting, profile 2103, 2104
- > Installation: For screwing

**Supplied with**  
5 pairs of mounting clips

Product type	Cat. No.
Mounting clip	833.95.761

Packing: 10, 100 or 1.000 Piece

→ End cap, for Häfele Loox5 profile for under mounting, profile 2104

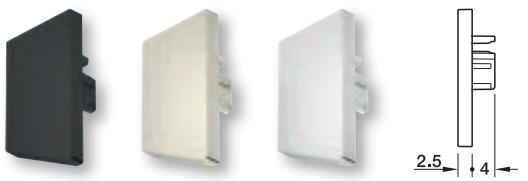

- > Material: Plastic
- > Equipment: With drill mark for cable outlet
- > Suitable for: Häfele Loox5 profile for under mounting, profile 2104


**Supplied with**  
5 pairs of end caps

Colour/finish	Cat. No.
Black	833.95.784
Stainless steel coloured, Brushed	833.95.785
Silver coloured	833.95.783

Packing: 10 or 50 Piece

→ Diffuser Häfele Loox5

width 11 mm

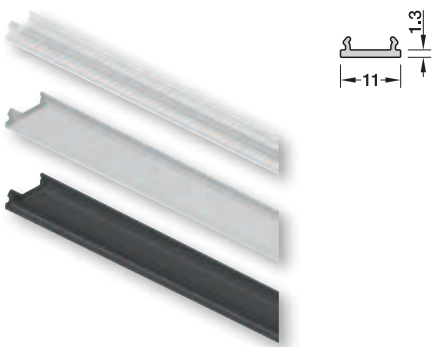

- > Material: Plastic

**Note**  
The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with the black and transparent versions.

**Supplied with**  
1 diffuser

Width mm	Diffuser colour/finish	Light permeability	2500 mm	3000 mm
11	Transparent	~ 90%	833.95.807	833.95.757
	Opal	70–80%	833.95.805	833.95.755
	Black	~ 20%	833.95.809	833.95.759

Packing: 1 or 25 Piece

DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.